

PRODUCT SPECIFICATION FOR INFORMATION

PRELIMINARY SPECIFICATION


Product Name: Cavity Band Pass Filter

Part No: MBP-C2728_464MS-A-R0

■ History List

No.	Rev. No.	Description	Date	Author	Final Approver
1	R0	Draft	2022.07.26	Bryan Jeon	Michael Jeon

■ Mechanical Drawing

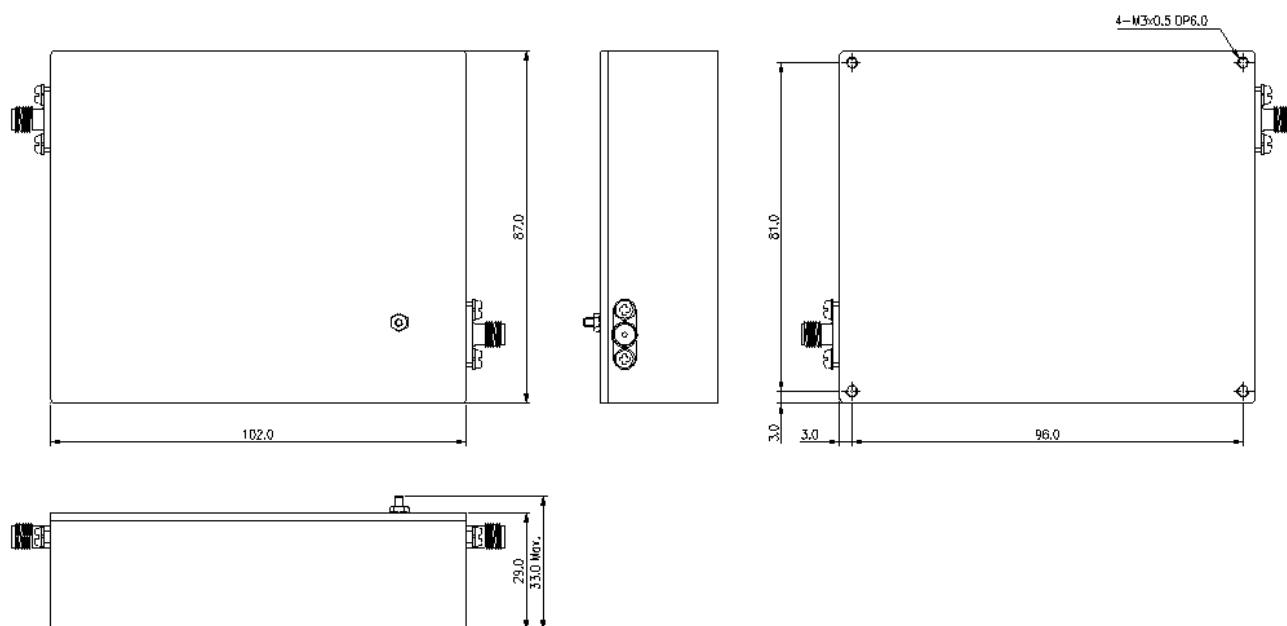

Note

1. Connector : SMA(f)
2. Finish :Black Epoxy

■ Electrical Specification

Parameter	Specification	Remark
1. Center Frequency	2728MHz	
2. Bandwidth	$F_c \pm 232\text{MHz}$ [2496~2960MHz]	
3. Insertion Loss in BW	1.0dB Max.	
4. Ripple in BW	0.7dB Max.	
5. Return Loss in BW	18dB Min.	
6. Attenuation	60dB Min.@ DC~2360MHz	
	60dB Min.@ 3550~3700MHz	
7. In/Out Impedance	50Ω	
8. Power Handling	5W	
9. Connector	SMA(f)	
10.Dimension	102.0x87.0x29.0 mm	
11. Temperature Range	-40°C to +85°C	

Remarks: This is a preliminary datasheet for reference.

■ Simulation Curve

