
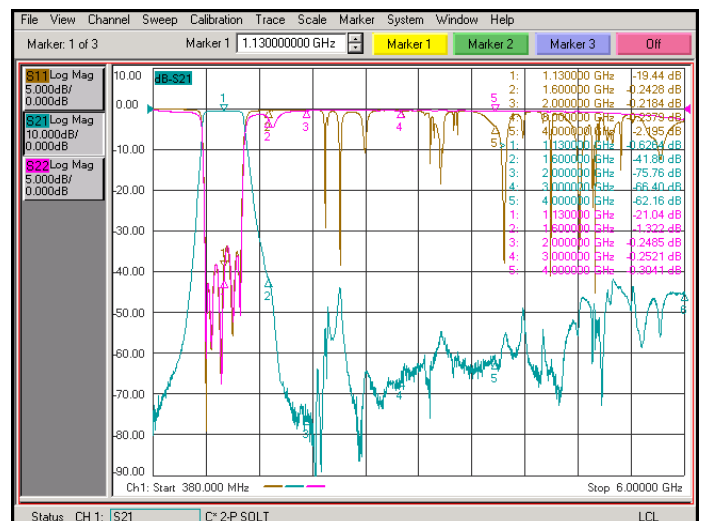


1. Center Frequency : 1130MHz
2. Bandwidth : 340MHz
3. Insertion Loss : 0.8dB Max.
4. Rejection : 30dB Min @ 810MHz
 22dB Min @ 1450MHz
 45dB Min @ 660MHz
 40dB Min @ 1600MHz
 60dB Min @ 460MHz
 65dB Min @ 1800MHz
 40dB Min up to 6000MHz
5. V.S.W.R : 1.5 : 1
6. Power Handling : 2W(Typ.) 8W(Max.)
7. Operating Temperature : -40℃ ~ +70℃
8. Storage Temperature : -55℃ ~ +85℃
9. Size : 47 X 23 X 9.5mm

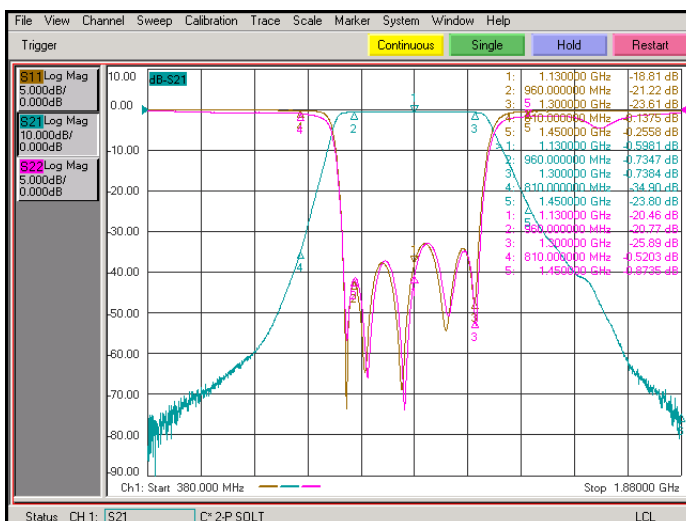

[PLOT DATA]