



PRODUCT SPECIFICATION FOR INFORMATION

- Customer : SARAS
- Product Name : CERAMIC MONO BAND PASS FILTER
- Part No : MMP6D2535BP70M


TOP VIEW

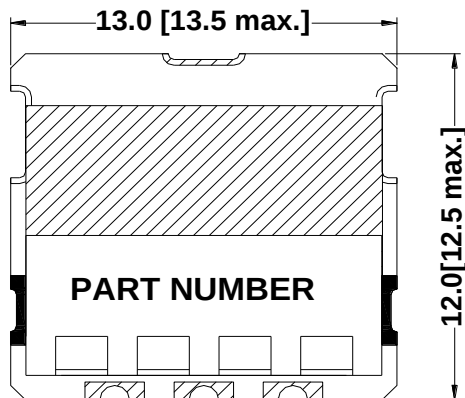

BOTTOM VIEW

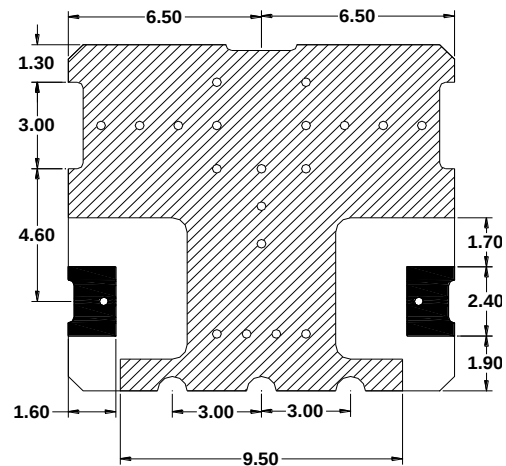


FRONT VIEW

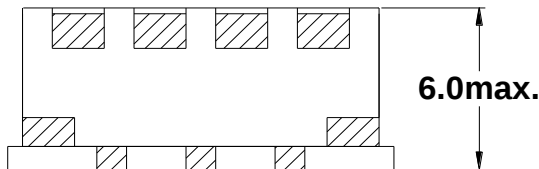

I/O PORT
GROUND
TOLERANCE: ± 0.2
UNIT: mm

1. Center Frequency : 2535MHz
2. Bandwidth : 70MHz
3. Passband : 2500 ~ 2570MHz Min.
4. Insertion Loss : 2.5dB Max.
5. Return Loss : 15dB Min.
6. Attenuation : 35dB Min. @ DC ~ 1956MHz
30dB Min. @ 2400MHz
30dB Min. @ 2620 ~ 4000MHz
7. Input Power : 1W Avg.
8. Impedance : 50Ω
9. Operating Temperature : -40°C ~ +85°C

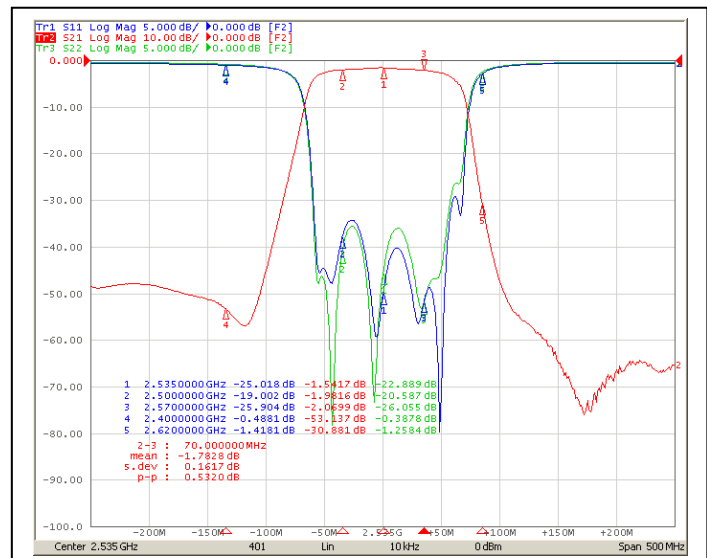

[TEST PLOT]