

PRODUCT SPECIFICATION FOR INFORMATION


FINAL SPECIFICATION

Product Name : LC Band Pass Filter

Part No : MBP-C3625_2.25GL-A-R6

.	Rev. No.	Description	Date	Author	Final Approver
1	R0	Draft	2020.12.08	Bryan Jeon	Michael Jeon
2	R1	Added the simulation curve	2021.06.04	Bryan Jeon	Michael Jeon
3	R2	Temperature range has been changed from -20deg/+60deg to -30deg/+70deg	2021.06.16	Bryan Jeon	Michael Jeon
4	R3	Has changed filter dimension	2021.07.22	Bryan Jeon	Michael Jeon
5	R4	Added the X-axis and Y-Axis dimensions	2021.08.24.	Bryan Jeon	Michael Jeon
6	R5	Has changed mounting hole distance with glass bead height. And updated recommended land pattern	2021.10.05.	Bryan Jeon	Michael Jeon
7	R6	Has changed pin height with pin length	2021.10.12.	Bryan Jeon	Michael Jeon

■ Mechanical Drawing

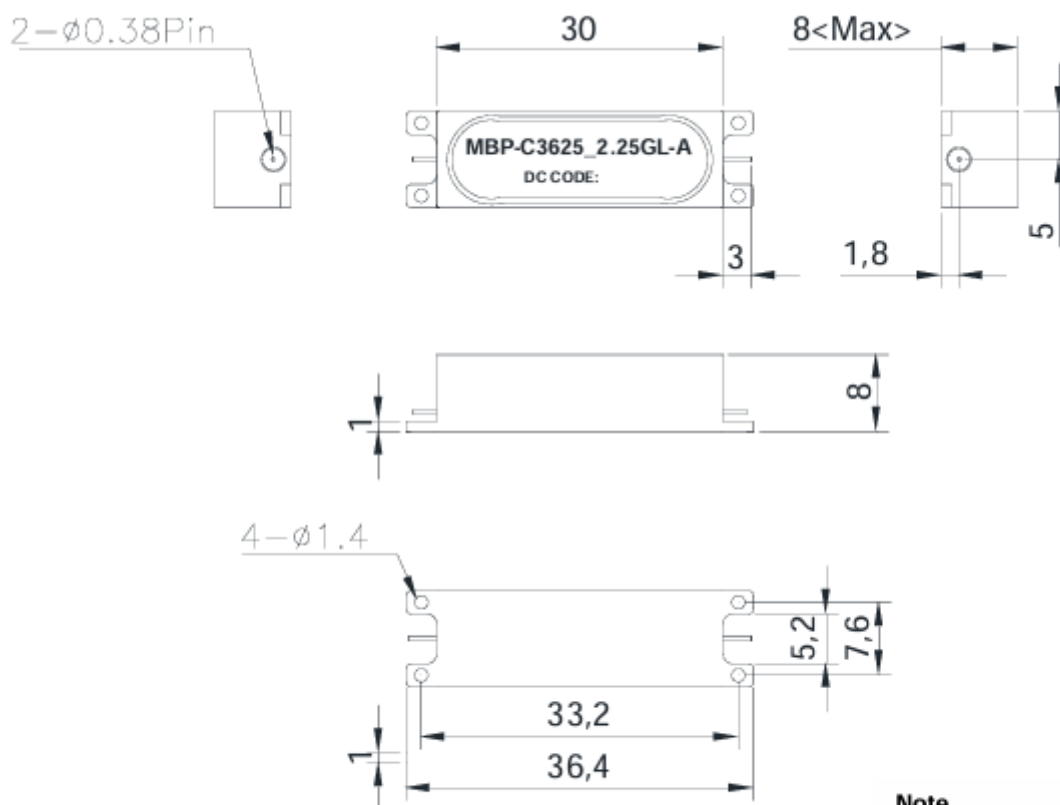


Note
 1. Connector : SMD
 2. Pin Plating : Au
 3. Pin diameter : 0.38mm
 3. Finish : Ag Plating

■ Electrical Specification

Parameter	Specification	Remark
1.Center Frequency	3625MHz	
2.Pass Band Frequency	C.F $\pm$ 1125MHz[2500~4750MHz]	
3.Insertion Loss	2.5dB Max.	
4.Return Loss	10dB Min.	
5.Rejection	20dB Min @ 2000MHz 50dB Min @ 6000MHz	
6.Impedance(I/O)	50 Ω	
7.Connectors(I/O)	SMD	
8.Dimension(W x D x H)	See above dimension	Unit : mm
9. Input RF Power	1W Avg.Max.	
10.Operating Temperature	-30 $^{\circ}$ C~70 $^{\circ}$ C	

■ Test Curve

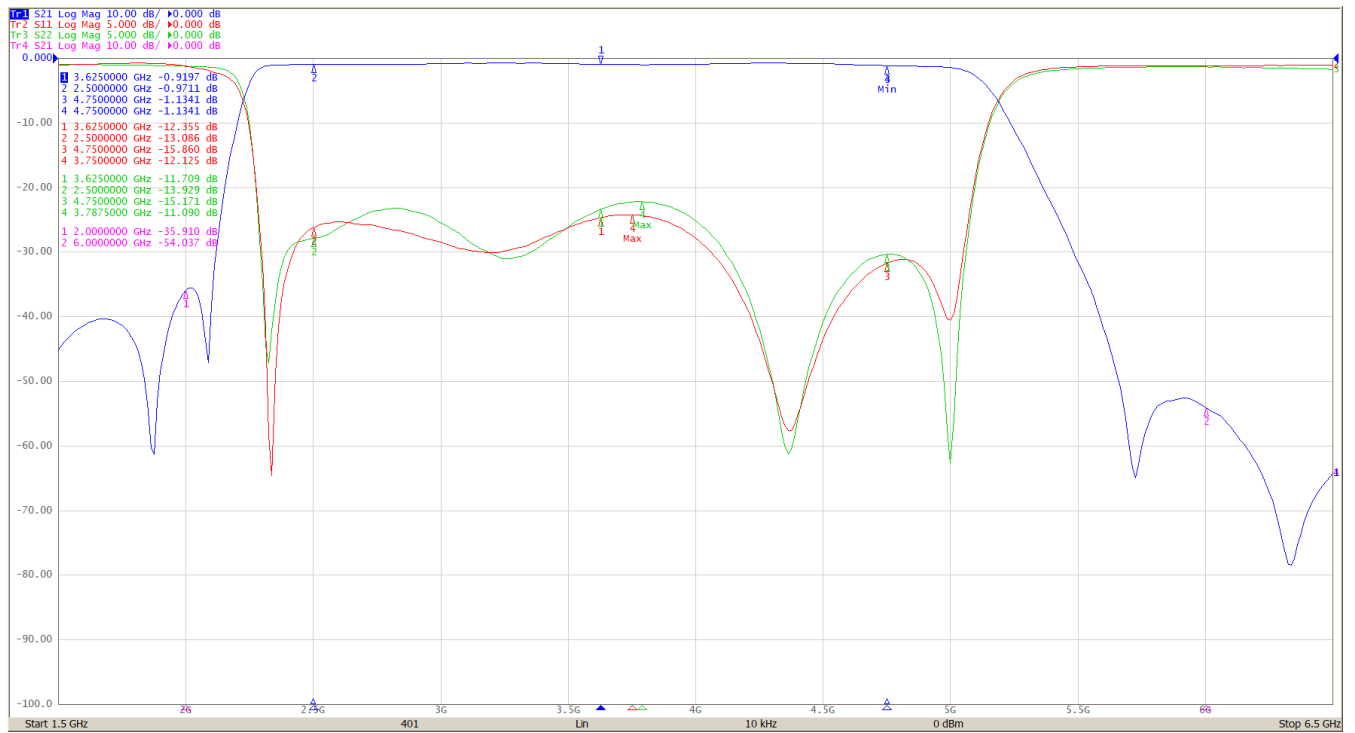

■ RECOMMENDED LAND PATTERN

