

PRODUCT SPECIFICATION FOR INFORMATION

FINAL SPECIFICATION


Product Name: Band Pass Filter

Part No: MBP-C930_20MS-B-R0

■ History List

No.	Rev. No.	Description	Date	Author	Final Approver
1	R0	Draft	2022.11.21	Bryan Jeon	Michael Jeon

■ Mechanical Drawing

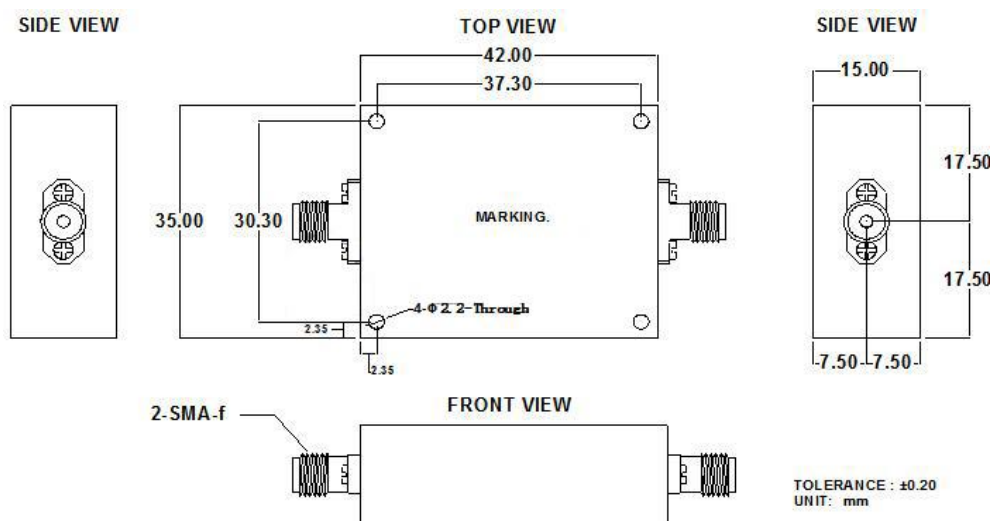

Note
1. Connector: SMA(F)
2. Finish: Black Epoxy Painting

■ Electrical Specification

Parameter	Specification	Remark
1. Center Frequency	930MHz	
2. Bandwidth [3dB BW]	Fc ±10MHz[920~940MHz]	
3. Insertion Loss in BW	1.0dB Max.	
4. Ripple in BW	0.4dB Max.	
5. Return Loss in BW	15dB Min.	
6. Attenuation	50dB Min.@ 50~870MHz	
	30dB Min.@ 1000~2000MHz	
7. In/Out Impedance	50Ω	
8. Power Handling	30W	CW
9. Connector	SMA(f)	
10.Dimension	42.0x35.0x15.0mm	
11. Temperature Range	-20°C to +80°C	
12. Relative Humidity	10%~95%	
13. Random Vibration	MIL-STD-810 F Method 514.5 procedure C1. 3 axes , 20 min. per each axis.	
14. Shock	20g, 11msec half saw tooth, Design to meet.	
15. Dust	MIL 810F Method 510.4 Procedure III settling dust Safety requirement: approved according to UL/CE or similar standards	

TEST CURVE

Tr3 S22 Log Mag 5.000dB/ Ref 0.000dB [F2]

