

PRODUCT SPECIFICATION FOR INFORMATION

PRELIMINARY SPECIFICATION


Product Name : Ceramic Band Pass Filter

Part No : MBP-C2250_100MM-B-R0

■ History List

No.	Rev. No.	Description	Date	Author	Final Approver
1	R0	Draft	2025.11.24.	Jeffrey Jeong	Michael Jeon
2					
3					
4					
5					
6					

■ Mechanical Drawing

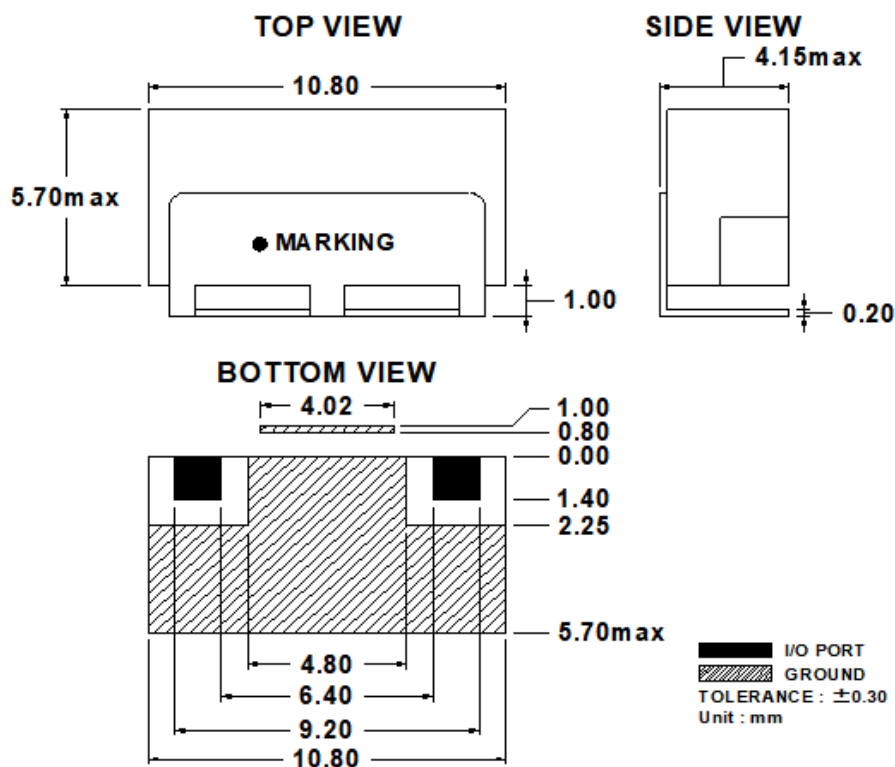

■ Electrical Specification

Parameter	Specification	Remark
1. Center Frequency	2250MHz	
2. Bandwidth	100MHz [2200 ~ 2300MHz]	
3. Insertion Loss @ Fo	1.0dB Max.	
4. Ripple in BW	0.5dB Max.	
5. V.S.W.R. in BW	1.4 : 1 Max	
6. Attenuation[Absolute Value]	23dB min @ 2100MHz & 2400MHz	
7. Power Handling	36dBm Max.	
8. In/Out Impedance	50Ω	
9. Operating Temp Range	-40°C ~ +70°C	
10. Storage Temp Range	-55°C ~ +85°C	
14. Dimension[WxDxH]	10.8 X 6.7 X 4.15mm ± 0.3 Max	

※It is subjected to change with prior notice.

■ Simulation Curve

