

PRODUCT SPECIFICATION FOR INFORMATION

PRELIMINARY SPECIFICATION


Product Name : Ceramic Band Pass Filter

Part No : MBP-C1300_200MM-A-R0

■ History List

No.	Rev. No.	Description	Date	Author	Final Approver
1	R0	Draft	2024.07.16.	Jeffrey Jeong	Michael Jeon
2					
3					
4					
5					
6					

■ Mechanical Drawing

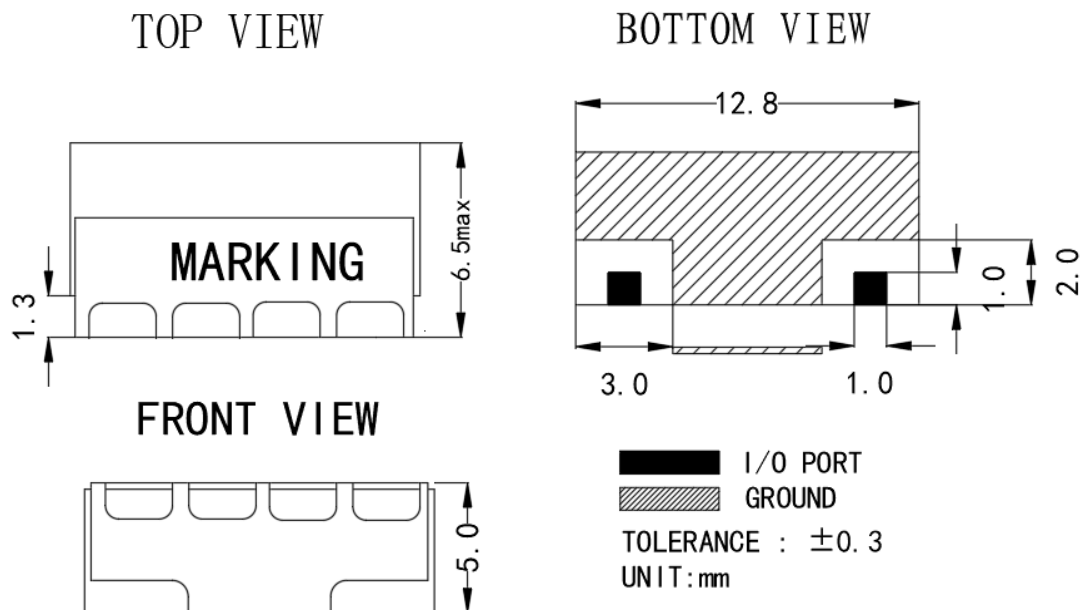

■ Electrical Specification

Parameter	Specification	Remark
1. Center Frequency	1300MHz	
2. Bandwidth	200MHz [1300 ~ 1400MHz]	
3. Insertion Loss in BW	1.5dB Max.	
4. Ripple in BW	1.0dB Max.	
5. V.S.W.R. in BW	1.5 : 1 Max	
6. Attenuation[Absolute Value]	40dB min @ 1000 ~ 1100MHz 40dB min @ 1500 ~ 1600MHz	
7. Power Handling	30dBm Max.	
8. In/Out Impedance	50Ω	
9. Operating Temp Range	-40°C ~ +70°C	
10. Storage Temp Range	-55°C ~ +85°C	
11. Dimension[WxDxH]	12.8 X 6.5 X 5.0mm ± 0.3 Max	

※It is subjected to change with prior notice.

■ Simulation Curve

