

PRODUCT SPECIFICATION FOR INFORMATION

PRELIMINARY SPECIFICATION


Product Name : Ceramic Band Pass Filter

Part No : MBP-C5800_200MM-A-R0

■ History List

No.	Rev. No.	Description	Date	Author	Final Approver
1	R0	Draft	2024.07.28.	Jeffrey Jeong	Michael Jeon
2					
3					
4					
5					
6					

■ Mechanical Drawing

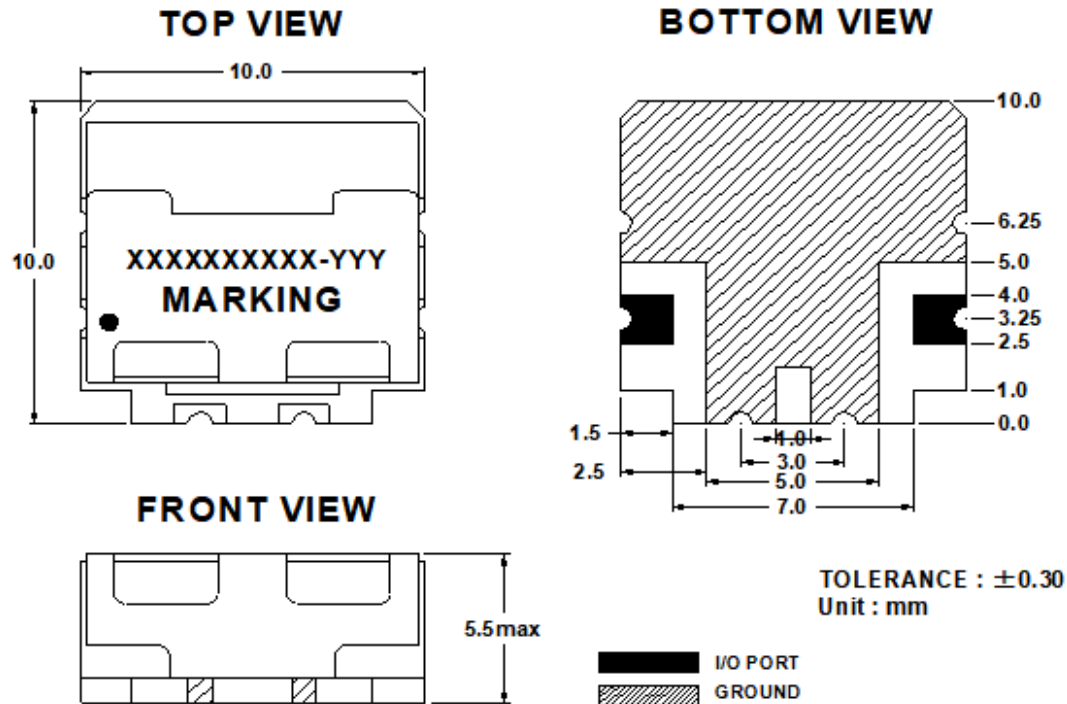

■ Electrical Specification

Parameter	Specification	Remark
1. Center Frequency	5800MHz	
2. Bandwidth	200MHz [5700 ~ 5900MHz]	
3. Insertion Loss in BW	14dB Max.	
4. Ripple in BW	1.0dB Max.	
5. V.S.W.R. in BW	1.5 : 1 Max	
6. Attenuation[Absolute Value]	60dB min @ 4300MHz 40dB min @ 5000MHz 15dB min @ 5415MHz 15dB min @ 6195MHz 30dB min @ 6600MHz	
7. Power Handling	30dBm Max.	
8. In/Out Impedance	50Ω	
9. Operating Temp Range	-40°C ~ +70°C	
10. Storage Temp Range	-55°C ~ +85°C	
14. Dimension[WxDxH]	10.0 X 10.0 X 5.5mm ± 0.3 Max	

※It is subjected to change with prior notice.

■ Simulation Curve

